



SHENSHENG

For More Information,
www.shsstech.com



50L EX Proof Jacketed Glass Filter – FR-S50EX



Shanghai Shensheng Biotech Co., Ltd.
Add: 937 Chenxiang, Road, Shanghai, China
Tel: +86 21 - 62716917
Fax: +86 21 - 62716705
E-mail: info@shsstech.com

50L EX Proof Jacketed Glass Filter – FR-S50EX



Overview

All-in-one Unit - Reaction and filtration can be finished in the same reactor. Especially for the insulated filtration of material vulnerable to crystallization. It can also be used as polypeptide reactor. EX proof is compulsory in EX zone.


- Capacity: 50L;
- EX Proof Rate: EXdIIBT4Gb;
- Full jacket coverage for better insulated filtration;
- Detachable bottom filter;
- Mechanical sealing, resist to chemicals and durable, max vacuum <20 mbar;
- PTFE lid, durable and resist to chemicals;
- Stirring speed range: 0 - 300 rpm;
- Quality borosilicate glass 3.3 (BORO 3.3);
- Minimized dead space and no leakage;
- Built-in hand lift mechanism.

Model

Capacity (L)

FR - S **50** EX

Technical Specification & Configuration

Parameter	
Model	FR-S50EX
Capacity (L)	50L
EX Proof Rate 	EXdIIBT4Gb
Vessel Structure	Double Wall, Fully Jacketed
Lid Diameter (mm)	265 mm
Nozzle on Lid	6 (NS24+NS29+NS34×2+DN60+DN50)
Drain Diameter	25 mm
Temp. Range (°C)	-60 - 200°C
Max Vacuum (mbar)	< 20 mbar (-0.098MPa)
Stirring Power (W)	370 W
Stirring Speed (rpm)	0 – 300
Glass Material	Borosilicate Glass 3.3 (BORO 3.3)
Frame Material	SUS304
Stirring Shaft	SUS304 Covered with PTFE
Agitator	Propeller
Filter Housing	PTFE
Dimension (cm)	115×80×230H
Power Supply	220V/50Hz

Configuration

Model	FR-S50EX
Seal	Mechanical Sealing
Speed Controller	Variable Frequency Drive (VFD)
Reactor Lid	PTFE Lid – Six Nozzles
Drain Valve	PTFE Flush Valve
Digital Display	Stirring Speed, Temperature
Thermometer	Digital PT100
Vacuum Meter	Scale
Reflux Condenser	0.60sqm
Funnel	2000ml
Solid Feeding	PTFE , DN60
Bottom Filter	Detachable
Built-in Hand Lift	Equipped

Features

Nozzles on PTFE Lid



PTFE Lid with Lifespan >10years, Vacuum Tight up to <2mbar and Excellent Stirring Stability

Nozzles on Lid (Customizable per request)

- Solid feeding with pressure release valve
- Liquid feed valve – For liquid feeding and vacuum release
- Thermometer – PT100 digital display thermometer
- Condenser – Optional Distillation Piece or Distillation Separation Receiving
- Funnel – Control liquid feeding speed and volume

Bottom Discharge Valve



PTFE Flush Drain Valve
No dead space and no leakage.
Recommended for discharge of solid material. Drift diameter reaches 25mm.

Solid Feeding Nozzle




Solid Feeding Nozzle
Big size up to 60mm of the solid feeding nozzle is with PTFE stopper which has vacuum release valve for opening up.

For 2L – 5L, it is an optional config.

Features



Detachable Bottom Filter

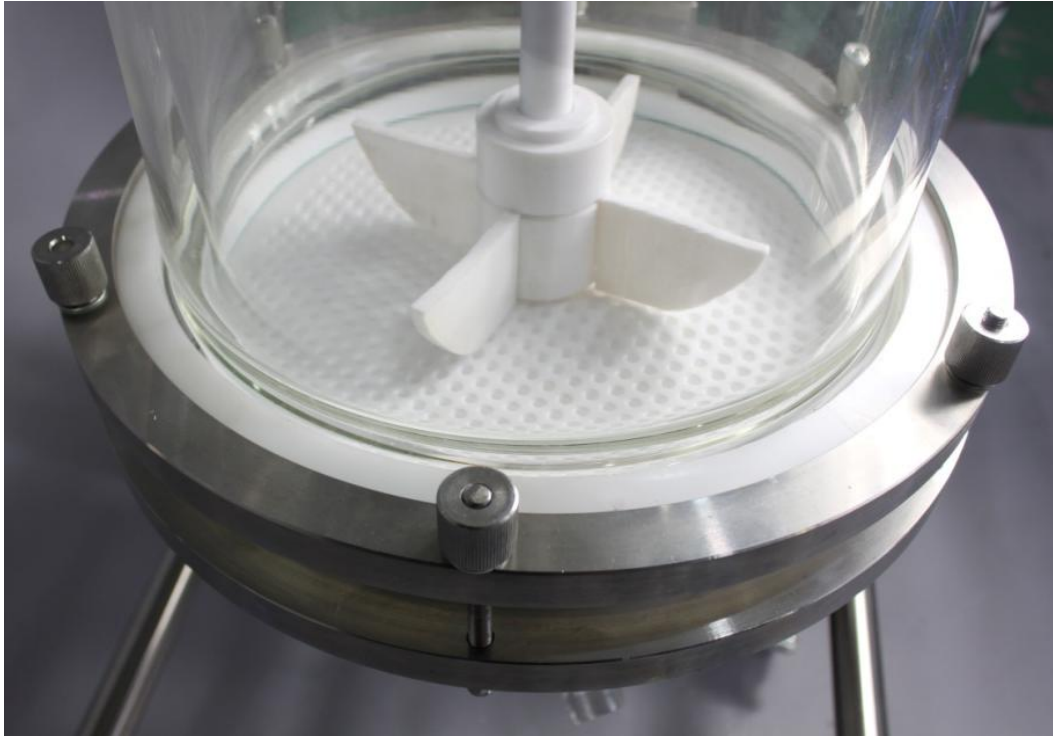

Filter housing made of PTFE with lifespan >10 years.

- Compact structure for quick and easy install by a single person.
- Easy change of filter. Compatible with all kinds of filter.
- Filter cake can be easily removed.
- Minimized dead space.

Jacket Full Coverage

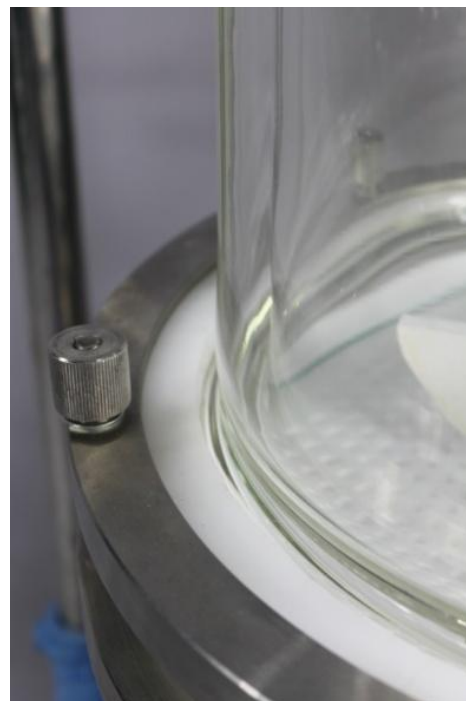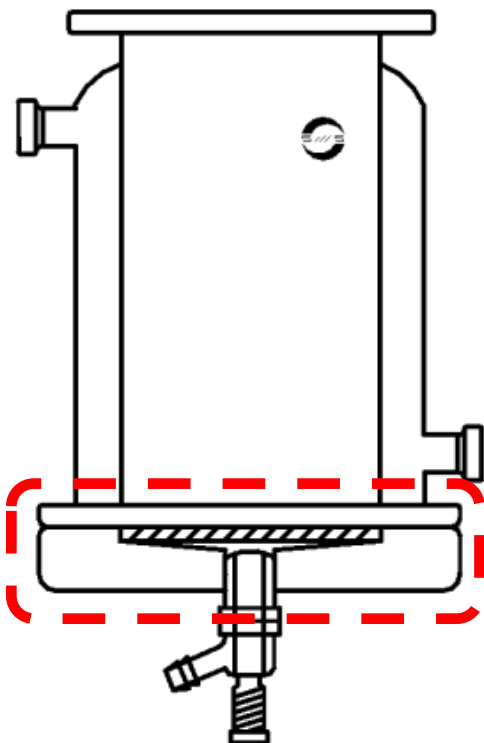

Full Jacket for insulated filtration against crystallization

Jacket covers down to the bottom flange, different from the design of top flange, to ensure the material in the vessel is 100% covered by heating or cooling jacket, especially for insulated filtration of material vulnerable to crystallization.

Flush drain valve to minimize dead space.


Durable Mechanical Sealing for Vacuum Tight



SiC+PTFE mechanical sealing ensures max vacuum level of <20mbar. Durable and well resistant to chemicals.

The performance and durability of mechanical sealing is generally much better than most O-ring sealing, because most O-rings always swells due to chemical corrosion which jeopardizes the air tightness of reactor.

Quality Borosilicate Glassware, PTFE/Teflon Stirrer

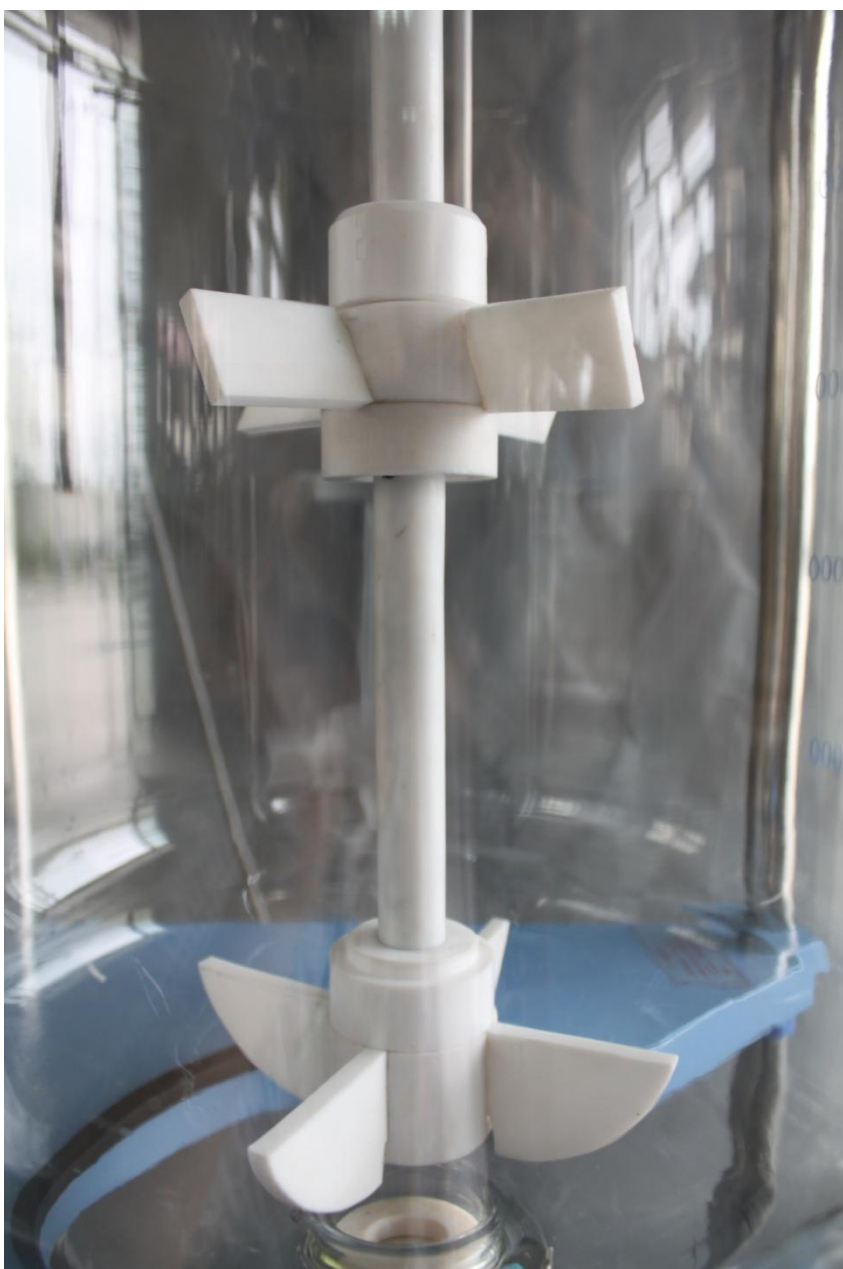


The quality of glassware is critical! The time and efforts you spent in the reaction is far more valuable than the jacketed glass reactor itself, let alone the cost of the solvents. The loss of glass broken is huge. So we provide Quality Borosilicate Glassware and give individual quality control to every unit.

Quality borosilicate glass 3.3 (BORO 3.3), with low coefficients of thermal expansion (3×10^{-6} at 20°C), is well resistant to thermal shock and less subject to thermal stress. Complying with ISO3585, the glassware have excellent performance against chemicals and water.

SUS304 stirring shaft covered with PTFE ensures strong stirring and resistant to chemicals.


PTFE propeller agitator. Dual agitators is optional, Propeller + Turbine for efficient mixing. The position of upper agitator is adjustable. Agitator can be modified per user needs.

Mechanical Seal VS Traditional Seal

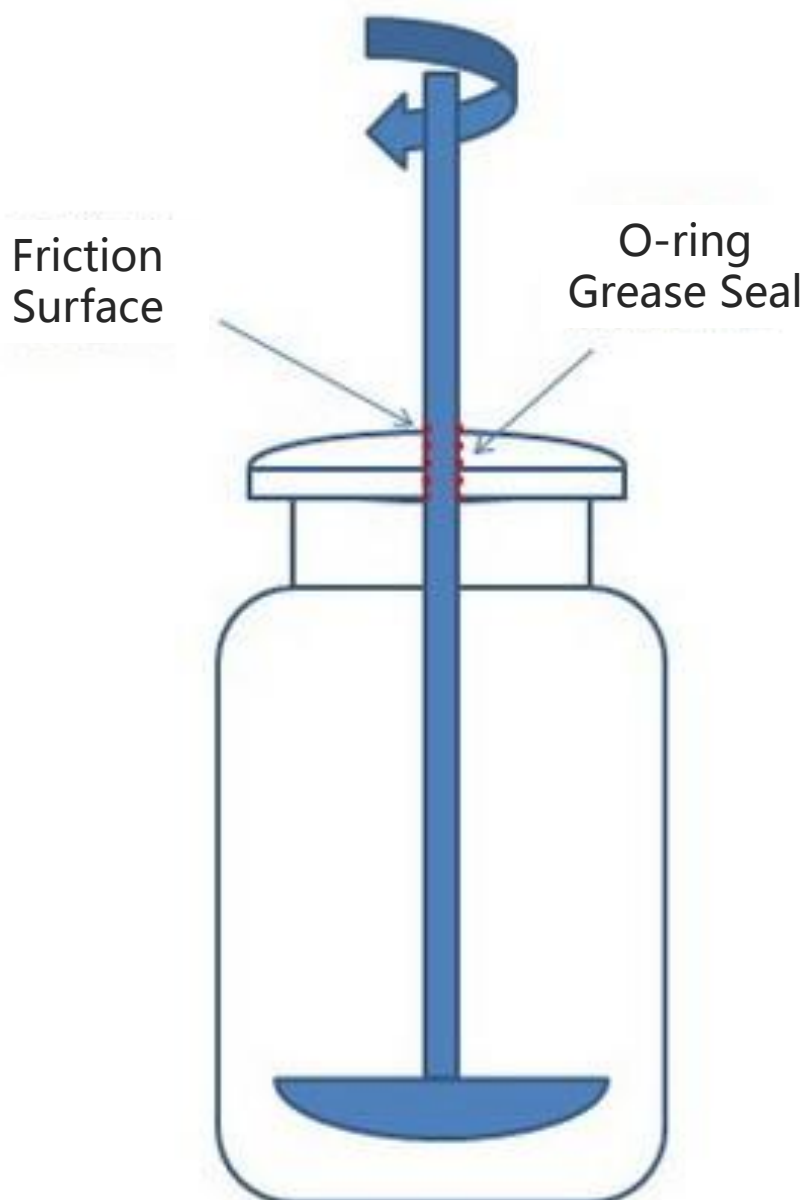

Traditional Seal – Seal on Axis

O-ring or Grease Seal is known as seal on axis to be used between stirring shaft and vessel lid, but is heavily prone to be worn out by friction, especially under corrosion of solvent and high temperature, which requires regular operation stop, disassemble and O-ring change.

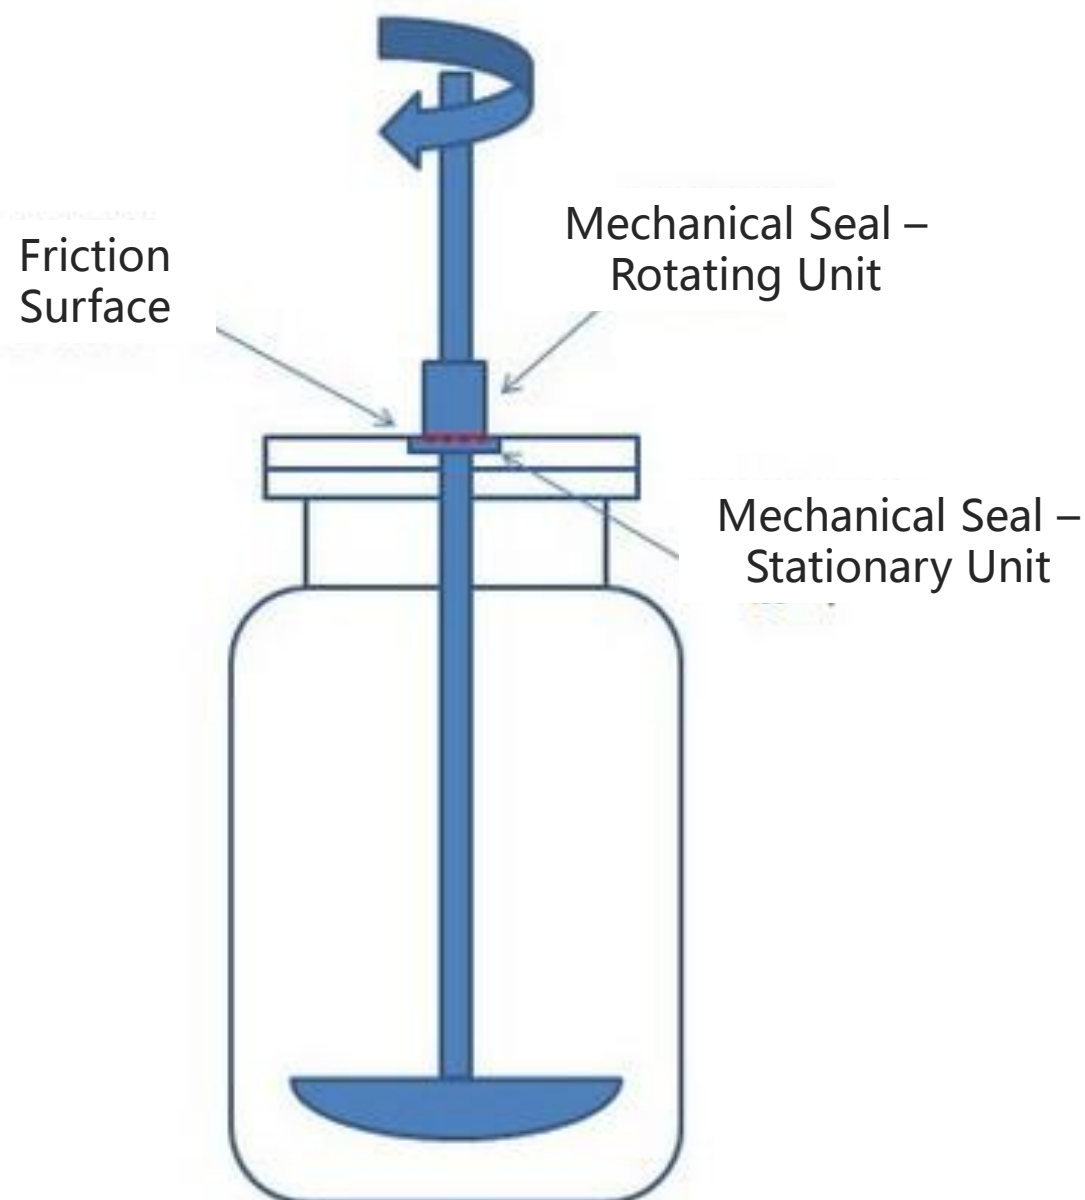

Mechanical Seal - Seal on Surface

Mechanical Seal is the seal on surface between its rotating part and stationary part. It is made of SiC and reinforced PTFE, which is vacuum tight, durable, long lasting and great for 24/7 operation.

With PTFE vessel lid, stirring can be very stable so that mechanical seal can ensure <20mbar vacuum level.

Optional Configuration: Agitators for Option



To ensure stirring effect, blade shape of agitator, anchor, turbine, propeller... can be chosen or customized according to solution nature, viscosity, capacity, stirring speed, vessel shape, etc.

Built-in Hand Lift Mechanism



Facilitate the change and install of filter.

Facilitate the removal of filter cake.

Strong structure. Safe and reliable.


Large Torque + Precise Control for Efficient Stirring - EX-proof



EX Proof motor with and VFD stirring speed controller (Variable Frequency Drive), provides precise control, large torque with constant speed & maximum 600 rpm.

EX Proof is compulsory when jacketed glass reactor is stationed and operated in EX Proof Zone in which there are explosive gas or dust.

We offer highest level of EX proof upgrade on Motor, Rotary Speed Controller, and Wiring per user needs.

EX-proof rate: EXdIIBT4Gb 
Protection Rate: IP55
Anticorrosion Rate: WF1

Optional Configuration: Jacketed Glass Bottom



Jacketed glass bottom is designed for better insulated filtration of material vulnerable to quick crystallization.

Optional Configuration: Insulation Cape



The heat exchange between reactor and atmosphere is huge during heating or cooling, which causes big energy waste.

Besides, during cooling reaction, the surface of the reactor will be wet and icy because of heat exchange, affecting reaction process.

Insulation cape is effective solution to this. With observation window, the whole reaction process can be watched.

Optional Configuration: PTFE Baffles



During stirring, especially at high speed, mixing is not full and whirlpool forms at the center of the material.

Baffle in the vessel is good solution.

PTFE baffles resist to chemicals and are easy to install or disassemble.

Optional Configuration: 5L Dripping System



5L Liquid dripping with controllable feeding speed and volume.

Capacity can be 5L or more.

Shape of dripping system can be spherical or cylinder.

Optional Configuration: High Viscosity Agitator



The blade of standard agitator is made of PTFE. It is prone to be out of shape under conditions of high temperature and high viscosity.

We give option of High Viscosity Agitator. It is made of SUS304, including the blades, and coated with PTFE, which ensures its hardness against high viscosity and resist to chemicals as well.

Jacketed Glass Filter Set

Along with Jacketed Glass Filter, Shanghai Shensheng provides Heating & Cooling Circulator and Vacuum Pump which are designed for optimal use with Jacketed Glass Reactor. We do a good job to ensure you are well equipped to have more time to focus on research.



Cooling Circulator



Compact Heating & Cooling Circulator



Heating Circulator

Heating/Cooling Source



Vacuum Source

Heating & Cooling Circulator



Provide both heating and cooling sources for Jacketed Glass Reactor.

Wide temperature range from -25 °C to 200 °C.

Close circulation of thermal oil to prevent oil mist and oxidization during heating and imbibitions from air during cooling, which ensures the purity of thermal oil to increase its lifespan.

Safety features including self-diagnosis, high pressure protection, overload relay, compressor over-temp protect.

Parameter

Model		HR-50
Temp. Control Range (°C)		-25 - 200°C
Temp. Control Accuracy (°C)		1°C
Flow Rate (L/min, bar)		35 L/min 2.0 bar
Heating Power (kW)		5
Cooling Power (kW)	200°C	5
	100°C	5
	0°C	4.5
	-20°C	3
Compressor		Emerson Copeland
Coolant		R-404A
Temperature Display		Digital
Close Circulation		●
Dimension (cm)		50×68×145
Power Supply		380V/50Hz

Water Circulation Vacuum Pump



Safe and reliable water circulation vacuum pump.

Equipped with five independent suction nozzles for vacuum supply.

Easy operation and maintenance.

Can be water supply for condenser.

Oil free and water saving.

Parameters

Model	SHZ – 95B
Type	Water Circulation
Max Vacuum (mbar)	20 mbar
Extraction Rate (L/min)	10L/min×5
Power (W)	550 W
Dimensions (cm)	45×35×82
Power Supply	220V/50Hz

Factory Show - Shanghai Shensheng Biotech Co., Ltd.



Manufacture Plant in Shanghai



Quality Mechanical Parts



Glassware Fabrication



Fine Processing



Individual quality control for every unit



Pilot Scale Jacketed Glass Reactor



Pilot Scale Rotary Evaporator

Our Customer



Shanghai Shensheng Biotech Co., Ltd.
 Add: 937 Chenxiang, Road, Shanghai, China
 Tel: +86 21 - 62716917
 Fax: +86 21 - 62716705
 E-mail: info@shsstech.com